


Campagnolo



1992 OFF-ROAD RANGE

RECORD O.R. GROUP

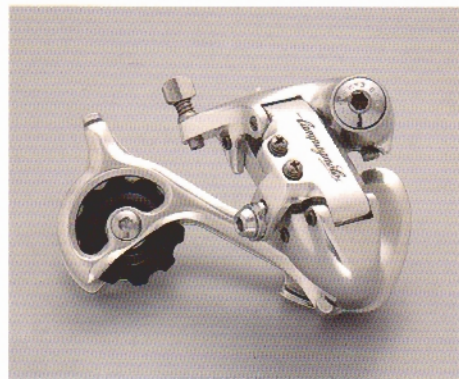


RECORD O.R. REAR DERAILLEUR

- code **RD-01OR** (S): short cage
 code **RD-02OR** (M): medium cage
 code **RD-03OR** (L): long cage
 - maximum sprocket: S 30 - M 32 - L 32 teeth
 - capacity: S 32 - M 38 - L 44 teeth
 - 8 speed - silent operation
 - compact type
 - parallelogram articulated on self-lubricating bushes



RECORD O.R. FRONT DERAILLEUR

- code **FD-01FOR**: clip-on version (Ø 28,6)
 code **FD-02FOR**: adjustable clip-on (Ø 28,6/33)
 code **FD-03FOR**: adjustable clip-on (Ø 35/36)
 - capacity: 16 teeth
 - frontal operation parallelogram
 - quick and precise derailment thanks to its particularly stiff structure and close tolerance

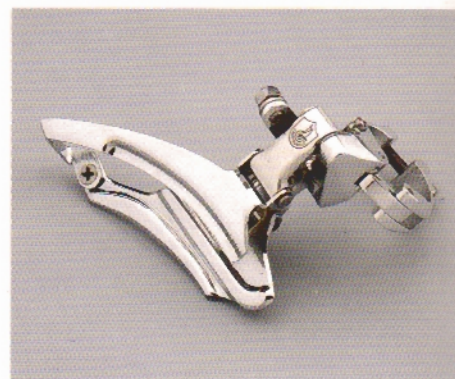

RECORD O.R. TOP-PULL FRONT DERAIL.

- code **FD-01TPOR**: clip-on version Ø 28,6mm
 code **FD-02TPOR**: adjust. clip-on (Ø 28,6/33)
 code **FD-03TPOR**: adjust. clip-on (Ø 35/36)
 - capacity: 16
 - especially designed for cable passage from top tube
 - frontal operation parallelogram
 - quick and precise derailment thanks to its particularly stiff structure and close tolerance



ICARUS BULLET SHIFTING LEVERS

- code **BS-02IC CG**
 - Bullet shifters with adjustable index tension
 - compact type, with improved ergonomic design and padded grip
 - integrated with brake levers
 - possibility to adjust the index tension during use
 - rubber handgrip with inner protection



ICARUS THUMB-SHIFTERS LEVERS

- code **SL-02TB CG**
 - precision index shifting; no over shift
 - front derailleur lever Multi positioning offers trimming capability
 - orbital positioning
 - best ergonomic function
 - maximum weight reduction



RECORD HEAD SET

- code **HS-01OR** (1") BC 1x24 TPI
 code **HS-03OR** (1 1/8") Over Size
 code **HS-04 OR** (1 1/4") Over Size
 - sealed mechanism with O-ring
 - featuring lubrication system on both cups
 - Selfform system
 - particularly precise tolerances which assure a long life



RECORD O.R. PEDALS

- code **PD-02OR**
 - compact and super light type
 - removable cage hard anodized with dual side usage
 - compatible with all toe-clips
 - ball bearing axle with adjustable cones and cups, protected by an O-ring seal
 - axle in special steel with precise working for a longer life



RECORD O.R. CRANKSET

- code **FC-01CSOR**
 - crank length: 170 - 175
 - inner chainring: 20-22 in steel
 - medium chainring: 30-32 in steel
 - outer chainring: 42-44 in aluminium
 - incorporated extractor
 - assembling cassette type chainring (CD System)
 - heat forged crank in aeronautical alloy



RECORD CART BOTTOM BRACKET


- code **BB-01CARTTBS** Italian- 36x24TPI
 code **BB-03CARTTBS** English- BC1,37 x 24 TPI
 code **BB-04CARTTBS** BC1,37 x 24 TPI - 73 mm
 - shell 68/70: axle length 111 mm
 - shell 73: axle length 114 mm
 - three sealed ball bearings
 - aluminium cups
 - compatible with CD System
 - quick assembly



RECORD O.R. BRAKES

code **BR-02CLTDOR**

- super compact cantilever type - super light
- new HP brake blocks with exceptional braking performance in all conditions
- high performance braking power
- anodized finishing
- spring tension adjuster
- blocks that can be positioned in 4 directions
- adjustable axial free play

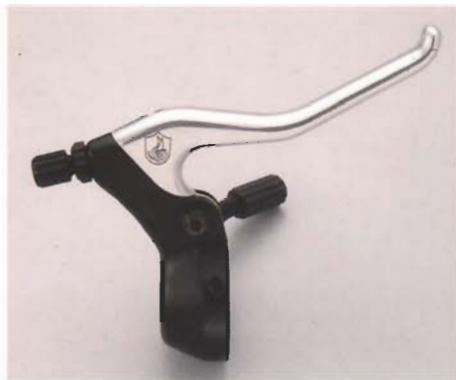

RECORD O.R. BRAKE LEVERS

for Bullet control levers

code **BL-02OR CG**

- super compact type: 2/3 fingers
- integrated with Bullet shifters
- super light type in aluminium
- maximum assembly ease
- best control of the bike due to lever grip contours



RECORD O.R. BRAKE LEVERS

for Thumb-shifters

code **BL-02ORTB CG**

- super compact type: 2/3 fingers
- integrated with Thumb-shifters
- super light type in aluminium
- maximum assembly ease
- best control of the bike due to lever grip contours



CARUS SEAT POST

code **SP-1C**

- length: 325 mm
- available Ø with aluminium stem : 25,4-26,6-26,8
- available Ø with steel stem: 27-27,2-28,6-29,4-29,8-30-31,6
- steel seat pillar with chromed mat finishing
- super light




RECORD O.R. HUBS

code **HB-00OR** front hub

code **FH-00OR** rear hub

- over lock nut dimensions: front 100 mm rear 135 mm
- spoke holes: 32-36, small flange
- rear hub with 8 speed cassette freewheelbody
- sealed mechanism with dual lubricant system

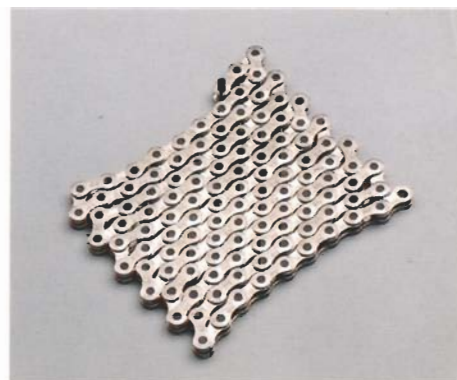

CONTAX CHAIN

code **CN-CA68S** with 116 links

- super narrow chain: 6,85 mm
- optimal flexibility: for quickest shifting and maximum precision
- exceptional performance under load



STEEL CASSETTE SPROCKETS

code **CS-8S**

- A revolutionary new design incorporating three different tooth profiles onto each sprocket will guarantee precise chain engagement and smooth shifting.
- possibility of combinations at customer's choice without limitations
- perfect interlocking among sprocket, chain, chainring, for quick and precise changes, which increases the life of the transmission system

Standard combinations for steel or aluminium sprockets:

11/12/13/14/15/16/17/18
 11/12/13/14/15/17/19/21
 11/12/13/15/17/19/21/23
 12/13/14/15/16/17/18/19
 12/13/14/15/16/17/19/21
 12/13/14/15/17/19/21/23
 12/13/14/16/18/21/24/28
 13/14/15/16/17/18/19/21
 13/14/15/16/17/19/21/23
 13/14/15/17/19/21/23/26
 13/14/16/18/20/23/26/30
 13/14/16/18/21/24/28/32
 14/15/16/17/18/20/22/24



SUPER RECORD CASSETTE SPROCKETS

code **CS-8SR**

- sprockets in aluminium alloy
- available sprockets: 13-14-15-16-17-18-19-20-21-22-23-24
 P.S.: these sprockets are interchangeable with steel sprockets except first position
- maximum reduction of weight (approximately 60% lighter than traditional steel cassette sprockets) using aluminium alloy to grant reliability and life with a special surface treatment

ICARUS GROUP



ICARUS REAR DERAILLEUR

- code **RD-01IC** (S): short cage
 code **RD-02IC** (M): medium cage
 code **RD-03IC** (L): long cage
 - maximum sprocket: S 30 - M 32 - L 32 teeth
 - capacity: S 32 - M 38 - L 44 teeth
 - 8 speed - silent operation
 - compact type
 - parallelogram articulated on self-lubricating bushes



RECORD O.R. FRONT DERAILLEUR

- code **FD-01FOR**: clip-on version (Ø 28,6)
 code **FD-02FOR**: adjustable clip-on (Ø 28,6/33)
 code **FD-03FOR**: adjustable clip-on (Ø 35/36)
 - capacity: 16 teeth
 - frontal operation parallelogram
 - quick and precise derailment thanks to its particularly stiff structure and close tolerance



RECORD O.R. TOP-PULL FRONT DERAIL.

- code **FD-01TPOR**: clip-on version Ø 28,6mm
 code **FD-02TPOR**: adjust. clip-on (Ø 28,6/33)
 code **FD-03TPOR**: adjust. clip-on (Ø 35/36)
 - capacity: 16
 - especially designed for cable passage from top tube
 - frontal operation parallelogram
 - quick and precise derailment thanks to its particularly stiff structure and close tolerance



ICARUS BULLET SHIFTING LEVERS

- code **BS-02IC CG**
 - Bullet shifters with adjustable index tension
 - compact type, with improved ergonomic design and padded grip
 - integrated with brake levers
 - possibility to adjust the index tension during use
 - rubber handgrip with inner protection



ICARUS THUMB-SHIFTERS LEVERS

- code **SL-02TB CG**
 - precision index shifting: no over shift
 - front derailleur lever Multi positioning offers trimming capability
 - orbital positioning
 - best ergonomic function
 - maximum weight reduction



CONTAX HEAD SET

- code **HS-01CO** (1") BC 1x24 TPI
 code **HS-03CO** (1 1/8") over size
 code **HS-04CO** (1 1/4") over size
 - Selform system
 - particularly precise tolerances which assure a long life



ICARUS PEDALS

- code **PD-02IC**
 - compact and super light type
 - removable cage with dual side usage
 - compatible with all toe-clips
 - ball bearing axle with adjustable cones and cups, protected by an O-ring seal
 - axle in special steel with precise working for a longer life



ICARUS CRANKSET

- code **FC-01CSTC**
 - crank length: 170 - 175
 - inner chainring: 20-22 in steel
 - medium chainring: 30-32 in steel
 - outer chainring: 42-44 in aluminium
 - assembling cassette type chainring (CD System)
 - heat forged crank in aeronautical alloy



CART 111 BOTTOM BRACKET

- code **BB-01CART**: Italian - 36 x 24 TPI
 code **BB-03CART**: English - BC1,37 x 24 TPI
 - axle length: 111 mm (symmetric type)
 - cartridge type BB unit with sealed bearings
 - compatible with CD System
 - quick assembly
 - micrometric precision of the ball bearing tolerances which assure a long life



ICARUS BRAKES

code **BR-02CLTDIC**

- super compact cantilever type
- **new** HP brake blocks with exceptional braking performance in all conditions
- **high** performance braking power
- super light type
- anodized finishing
- **spring** tension adjuster
- blocks that can be positioned in 4 directions



CENTAUR BRAKE LEVERS

for Bullet control levers

code **BL-02CE CG**

- super compact type: 2/3 fingers
- brake levers covered with **anti-shock** padding
- integrated with **Bullet shifters**
- super light type
- maximum assembly **ease**
- best control of the bike due to lever grip contours



CENTAUR BRAKE LEVERS

for Thumb-shifters

code **BL-02CETB CG**

- super compact type: 2/3 fingers
- brake levers covered with **anti-shock** padding
- integrated with **Thumb-shifters**
- super light type
- maximum assembly **ease**
- best control of the bike due to lever grip contours



ICARUS SEAT POST

code **SP-IC**

- length: 32,5 mm
- available Ø with aluminium stem : 25,4-26,6-26,8
- available Ø with steel stem: 27-27,2-28,6-29,4-29,8-30-31,6
- steel seat pillar with chromed mat finishing
- super light




ICARUS HUBS

code **HB-00IC** front hub

code **FH-00IC** rear hub

- over lock nut dimensions: front 100 mm rear 135 mm
- spoke holes: 32-36, small flange
- rear hub with 8 **speed cassette** freewheelbody
- sealed mechanism with dual lubricant system

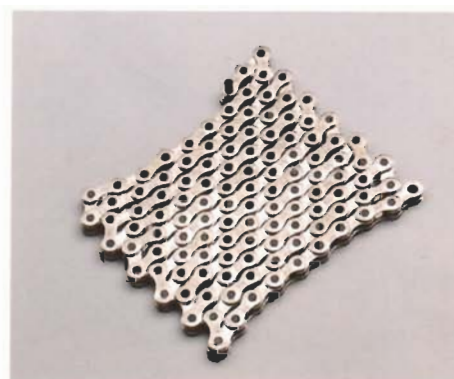

CONTAX CHAIN

code **CN-CA68S** with 116 links

- super narrow chain: 6,85 mm
- optimal flexibility: for quickest shifting and maximum precision
- exceptional performance under load



STEEL CASSETTE SPROCKETS

code **CS-8S**

- A **revolutionary** new design incorporating three different tooth profiles onto each sprocket will guarantee precise chain engagement and smooth shifting.
- possibility of combinations at customer's choice without limitations
- perfect interfacing among sprocket, chain, chain-ring, for quick and precise changes, which increases the life of the transmission system

Standard combinations for steel or aluminium sprockets:

11/12/13/14/15/16/17/18
 11/12/13/14/15/17/19/21
 11/12/13/15/17/19/21/23
 12/13/14/15/16/17/18/19
 12/13/14/15/16/17/19/21
 12/13/14/15/17/19/21/23
 12/13/14/16/18/21/24/28
 13/14/15/16/17/18/19/21
 13/14/15/16/17/19/21/23
 13/14/15/17/19/21/23/26
 13/14/16/18/20/23/26/30
 13/14/16/18/21/24/28/32
 14/15/16/17/18/20/22/24



SUPER RECORD CASSETTE SPROCKETS

code **CS-8SR**

- sprockets in aluminium alloy
- available sprockets: 13-14-15-16-17-18-19-20-21-22-23-24
 P.S.: these sprockets are interchangeable with **steel** sprockets except first position
- maximum reduction of weight (approximately 60% lighter than traditional steel cassette sprockets) using aluminium alloy to grant reliability and life with a special surface treatment

CENTAUR GROUP



CENTAUR REAR DERAILLEUR

- code **RD-02CE** (M): medium cage
 code **RD-03CE** (L): long cage
- maximum sprocket: M 32 - L 32 teeth
 - capacity: M 38 - L 44 teeth
 - 8 speed
 - silent operation
 - compact type
 - parallelogram articulated on self-lubricating bushes



RECORD O.R. FRONT DERAILLEUR

- code **FD-01FOR**: clip-on version (Ø 28,6)
 code **FD-02FOR**: adjustable clip-on (Ø 28,6/33)
 code **FD-03FOR**: adjustable clip-on (Ø 35/36)
- capacity: 16 teeth
 - frontal operation parallelogram
 - quick and precise derailment thanks to its particularly stiff structure and close tolerance



RECORD O.R. TOP-PULL FRONT DERAIL.

- code **FD-01TPOR**: clip-on version Ø 28,6mm
 code **FD-02TPOR**: adjust. clip-on (Ø 28,6/33)
 code **FD-03TPOR**: adjust. clip-on (Ø 35/36)
- capacity: 16
 - especially designed for cable passage from top tube
 - frontal operation parallelogram
 - quick and precise derailment thanks to its particularly stiff structure and close tolerance



CENTAUR BULLET SHIFTING LEVERS

- code **BS-02CE CG**
- Bullet shifters
 - compact type, with improved ergonomic design, with palm protection
 - integrated with brake levers
 - rubber handgrip with inner protection



ICARUS THUMB-SHIFTERS LEVERS

- code **SL-02TB CG**
- precision index shifting; no over shift
 - front derailleur lever Multi positioning offers trimming capability
 - orbital positioning
 - best ergonomic function
 - maximum weight reduction



CONTAX HEAD SET

- code **HS-01CO** (1") BC 1x24 TPI
 code **HS-03CO** (1 1/8") over size
 code **HS-04CO** (1 1/4") over size
- Selform system
 - particularly precise tolerances which assure a long life



CENTAUR PEDALS

- code **PD-02CE**
- compact and super light type
 - removable cage with dual side usage
 - compatible with all toe-clips
 - ball bearing axle with adjustable cones and cups, protected by an O-ring seal
 - axle in special steel with precise working for a longer life




ICARUS CRANKSET TD

- code **FC-01TDIC**
- crank length: 170 - 175
 - inner chainring: 24-26 in stainless steel
 - medium chainring: 34-36 in stainless steel
 - outer chainring: 46-48 in aluminium
 - heat forged crank in aeronautical alloy



CART 111 BOTTOM BRACKET

- code **BB-01CART**: Italian - 36 x 24 TPI
 code **BB-03CART**: English - BC1,37 x 24 TPI
- axle length: 111 mm (symmetric type)
 - cartridge type BB unit with sealed bearings
 - compatible with CD System
 - quick assembly
 - micrometric precision of the ball bearing tolerances which assure a long life

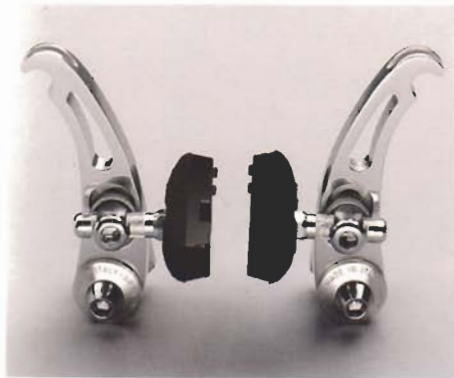

ICARUS BRAKES code BR-02CLTDIC

- super compact cantilever type
- new HP brake blocks with exceptional braking performance in all conditions
- high performance braking power
- super light type
- anodized finishing
- spring tension adjuster
- blocks that can be positioned in 4 directions



CENTAUR BRAKE LEVERS

for Bullet control levers

code BL-02CE CG

- super compact type: 2/3 fingers
- brake levers covered with anti-shock padding
- integrated with Bullet shifters
- super light type
- maximum assembly ease
- best control of the bike due to lever grip contours



CENTAUR BRAKE LEVERS

for Thumb-shifters

code BL-02CETB CG

- super compact type: 2/3 fingers
- brake levers covered with anti-shock padding
- integrated with Thumb-shifters
- super light type
- maximum assembly ease
- best control of the bike due to lever grip contours



ICARUS SEAT POST

code SP-IC

- length: 325 mm
- available Ø with aluminium stem : 25,4-26,6-26,8
- available Ø with steel stem: 27-27,2-28,6-29,4-29,8-30-31,6
- steel seat pillar with chromed mat finishing
- super light



CENTAUR HUBS

code HB-00CE front hub

code FH-00CE rear hub

- over lock nut dimensions: front 100 mm rear 135 mm
- spoke holes: 32-36, small flange
- rear hub with 8 speed cassette freewheelbody



CONTAX CHAIN

code CN-CA68S with 116 links

- super narrow chain: 6,85 mm
- optimal flexibility: for quickest shifting and maximum precision
- exceptional performance under load



STEEL CASSETTE SPROCKETS

code CS-8S

A revolutionary new design incorporating three different tooth profiles onto each sprocket will guarantee precise chain engagement and smooth shifting.

- possibility of combinations at customer's choice without limitations
- perfect interfacing among sprocket, chain, chain-ring, for quick and precise changes, which increases the life of the transmission system

Standard combinations for steel sprockets:

11/12/13/14/15/16/17/18
 11/12/13/14/15/17/19/21
 11/12/13/15/17/19/21/23
 12/13/14/15/16/17/18/19
 12/13/14/15/16/17/19/21
 12/13/14/15/17/19/21/23
 12/13/14/16/18/21/24/28
 13/14/15/16/17/18/19/21
 13/14/15/16/17/19/21/23
 13/14/15/17/19/21/23/26
 13/14/16/18/20/23/26/30
 13/14/16/18/21/24/28/32
 14/15/16/17/18/20/22/24

TANDEM components



TANDEM CRANKSET

code **FC-01TD**

- crank length: 170-175
- inner chainring: 24-26-28-30-32

- medium chainring: 34-36-40-42-44
- outer chainring: 46-48-50-52-54
- crankset is compatible only with the bottom bracket code BB-01TD/BB-03TD



TANDEM BOTTOM BRACKET

code **BB-01TD** Italian - 36 x 24 TPI

code **BB-03TD** English - BC1,37 x 24 TPI

- axle length: 124 mm
- balls Ø 1/4"
- compatible only with crankset FC-01TD



FRONT DERAILLEUR

for triple Contax crankset and Tandem crankset with toothing superior to 48 teeth

code **FD-01F**: clip-on version (Ø 28,6 mm)

code **FD-02F**: adjustable clip-on (Ø 29/33)

code **FD-01S**: braze-on version

- capacity: 16 teeth



TANDEM FRONT HUB

code **HB-00TD** front hub


- over lock nut dimensions: 100 mm
- spoke holes: 40-48, large flange
- increased axle to 10 mm diameter
- increased ball bearings "heavy duty"



TANDEM REAR HUB

cod. **FH-00TD** rear hub

- over lock nut dimensions: 140 mm
- spoke holes: 40-48, large flange
- rear hub with 8 speed cassette freewheelbody expressly designed for tandem
- increased axle diameter
- increased ball bearing "heavy duty"
- increased flanges diameter
- it employs the same 8 speed sprocket blocks as the road and off-road versions

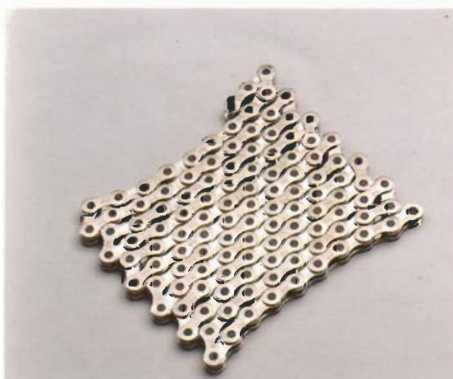

CONTAX CHAIN

code **CN-CA68S** with 116 links

code **CN-00TD** with 280 links

- super narrow chain: 6,85 mm
- optimal flexibility: for quickest shifting and maximum precision
- exceptional performance under load



BRAKE LEVERS

code **BL-02CXL CG**

- especially developed to be used with Record O.R., Icarus, Centaur and HP cantilever brakes
- inner straight pull cable system

code **BL-02DCCXL CG**

- brake levers with small cylinder preset for double braking system

Optionals



HP BRAKES

code **BR-02CLHP**

- cantilever type - super light type
- new HP brake blocks with exceptional braking performance in all conditions
- high performance braking power
- it requires less effort to apply to the brake lever
- anodized finishing - spring tension adjuster
- multidirection adjusting brake blocks



BRAKE LEVERS

code **BL-02CXL CG**

- especially developed to be used with Record O.R., Icarus, Centaur and HP cantilever brakes
- inner straight pull cable system

code **BL-02DCCXL CG**

- brake levers with small cylinder preset for double braking system



CAMPAGNOLO HANDGRIP

code **HL-00TB**

- it integrates our brake levers code BL-02CETB CG/BL-02ORTB CG
- exclusive ergonomic design
- antislip material
- it increases the control degree of the bike



CENTAUR QR PEDALS

code **PD-12CEQR**

- compact and super light type
- free lateral movement: $\pm 8^\circ$
- dual use possibility
- adjustable grip tension
- designed for easy mud evacuation



BOTTOM BRACKET CABLE GUIDE

code **AI-00CD**

- stainless steel type
- low friction factor
- to maintain constant shifting performances
- supplied as standard component with off-road groups
- supplied as optional with road and touring groups



CONTAX OVERSIZE HUB

code **HB-00CO**

- special hub for use with front suspension forks
- inner increased axle \varnothing 10 mm
- special sealed ball bearings with high endurance features to stand extreme stresses
- over lock nut dimension: 100 mm
- drillings: 32 - 36



COMPLETE SPROCKET DISPLAY BOARD

code **0138001**

- display in very resistant plastic material to be hung to the wall, very useful and convenient to put in order all the Campagnolo sprocket range.

The display board includes a complete set composed of:

- 16 first position sprockets
- 11 last position sprockets
- 48 middle position sprockets
- 20 resin spacers
- 2 11th teeth spacer rings
- 3 steel lock rings
- 3 spacers for sprocket hub body
- 1 lock ring tool

LUBRICANTS



Proper lubrication of components is essential to insure performance and durability.

For this reason Campagnolo is offering a new line of oil and grease with special characteristics of protection and lubrication.

OIL AMBER PLUS 5: it offers a very high degree of protection against oxidation and corrosion. ideal for regular maintenance especially for freewheels, cables and chains.

GREASE ONIX KB 3A: it is suggested for fine lubrication. It is specifically recommended for off-road bicycles that are subjected to use under severe conditons.

GREASE KRISTAL SR 7: it is suggested for assembling and routine maintenance for rear derailleurs, bottom brackets, pedals, hubs and headsets.

Code 1335004 tube of grease Onix KB 3A, 60 grams each

Code 1120008 jar of grease Kristal, 250 grams each

Code 1120009 jar of grease Kristal, 500 grams each

Code 1120010 tin of oil Amber Plus 5, 200 cc. each



Campagnolo reserve the possibility to modify the technical specifications of the products without notice.
Campagnolo decline all responsibilities for any improper use or tampering of the products.

CAMPAGNOLO S.R.L. - VIA DELLA CHIMICA, 4 - 36100 VICENZA - ITALIA - PHONE 0444-564933 - TELEFAX 0444-565062

CAMPAGNOLO SARL - RUE DU CHATEAU D'EAU - ROUZIERES DE TOURAINE - 37360 NEUILLE PONT PIERRE - FRANCE - PHONE 47-566569 - TELEX 750373 WEIFRA - TELEFAX 47-566779

CAMPAGNOLO USA INC. - 5245 AVENIDA ENCINAS, UNIT J- CARLSBAD - CALIFORNIA 92008- U.S.A. - PHONE 619-9310106 - TELEFAX 619-9310991

SERVICE AND TECHNICAL INFORMATION CENTRAL (ITALY) - Phone 0444/571871 U.S.A - Phone 619/9310106